

Automatic CHARGER BOOSTER



Réf. 025394

Gystart 1224.TE



The GYSTART 12.24 T is a three-phase machine and it permits to obtain a filtered current near the linear current. So it can start a vehicle even if there is no battery.

▲ CHARGER PART

Automatic loading : in "Electronic control" position, this device loads without supervision and it assures a better protection of the batteries and of the on-board electronic of the vehicle.

This device is equipped with the WU technology (it maintains permanently the batteries loaded). It can be connected permanently thanks to a regulation by indication of loading. Diagnostic indicator : loading / battery loaded.

Manual loading : loading with supervision and manual stop by the user. It permits a reloading without voltage limitation in order to restore discharged and sulphated batteries or to make rapid loadings.

- ▲ **STARTER PART :** in «Electronic control» position, it protects the vehicle against overvoltage thanks to an automatic monitoring system which controls the excess voltage output during the start.
With remote control switch.



- ▲ Mains supply protection
- ▲ Protection against short circuit, reversal polarity and over voltage
- ▲ Copper winding
- ▲ Cables \varnothing 35 mm², 2m50. Brass clips



MADE in FRANCE



EN 60335-2-29

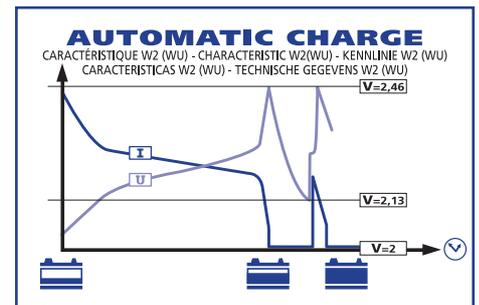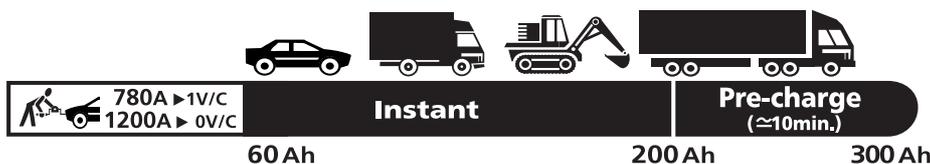

50/60 HZ V	FUSE A	START		CHARGE					pos. MANUAL	MIN. Ah MAX. 900	 cm	 Kg
		A 1V/C	A 0V/C	MOYEN (EN 60335) A	EFFICACE/RMS A	ELECTRONIC + A -	AUTOMATIC 					
400 TRI	16	780	1200	60	80	15 → 60	•	•	65 → 900	41 x 32 x 84	56	

BP 4159 - 53941 St-Berthevin - LAVAL CEDEX FRANCE

www.gys.fr • e-mail : gys@wanadoo.fr



+33 (0)2 43 68 35 21